

Submittal Data: System 12RLQ ASU12RLQ & AOU12RLQ



Job Name: _____ Location: _____
 Purchaser: _____
 Engineer: _____
 Submitted To: _____ For: Reference Approval Construction
 Submitted By: _____

Capacities:

Cooling	12,000 BTU/h
Min/Max Cooling	3,800/14,500
Outdoor Design Temperature <i>F° DB/WB</i>	95/75
Heating	16,000 BTU/h
Min/Max Heating	
Outdoor Design Temperature <i>F° DB/WB</i>	47/43
HSPF	10.55
SEER	21.0
EER <i>Cooling/Heating</i>	12.5/12.8
Low Ambient Temp. <i>F° Cooling/Heating</i>	14/5
Voltage/Frequency/Phase	208-230/60/1

Indoor Unit:

Noise Level Cooling <i>db (A) - H/ M/ L/ Q</i>	43/ 37/ 31/ 22
Noise Level Heating <i>db (A) - H/ M/ L/ Q</i>	42/ 37/ 30 /22
Weight	21 lbs.

Outdoor Unit:


Noise Level <i>db (A) - Cooling/Heating</i>	47/49
Recommended Fuse Size	20A
Min. Ampacity	12A
Running Current Cooling <i>(Rated/Max)</i>	4.5/7.0
Running Current Heating <i>(Rated/Max)</i>	5.7/10.0
Weight	82 lbs.

Refrigerant Piping:

Max Ht. Difference	49 ft.
Max Total or Combined Length	66 ft.
Discharge Vapor Line (O.D.)	1/4 in.
Suction (O.D.)	3/8 in.

Note: Figures are based on 230 Volts

OUTLINE AND DIMENSIONS

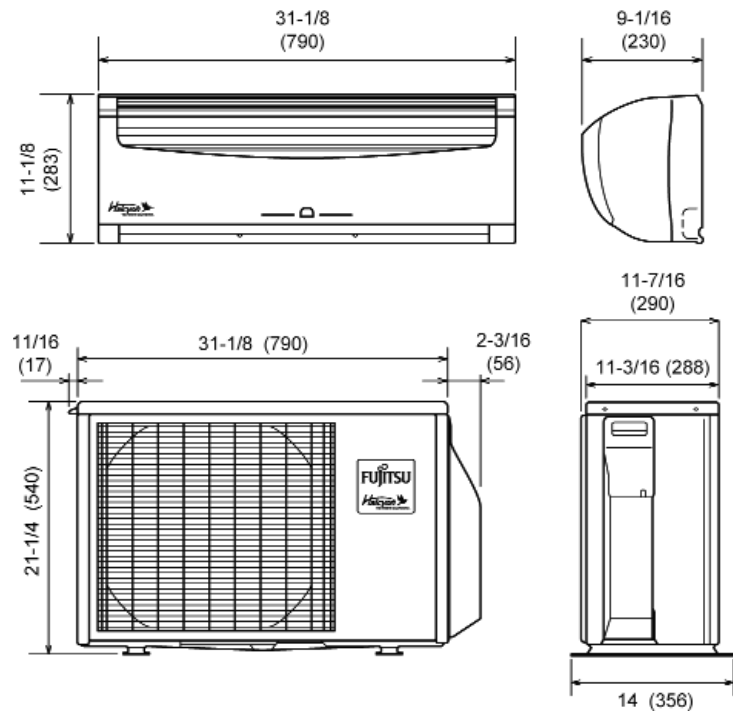

Standard Features:

- ◆ Six year compressor warranty
- ◆ Two year parts warranty
- ◆ Refrigerant R410A
- ◆ Plasma filter
- ◆ Auto Mode; Dry mode
- ◆ Optional Wired Remote Control
- ◆ Sleep timer; 24 hour timer
- ◆ Built in Low Ambient
- ◆ Auto Restart/ Reset
- ◆ Cold Prevention
- ◆ Auto Louvre: Up/Down
- ◆ Digital Wireless Remote Control

Notes:
