

Submittal Data: System 24CL ASU24CL & AOU24CL



Job Name:	Location:			
Purchaser:				
Engineer:				
Submitted To:	For:	☐ Reference	☐ Approval	☐ Construction
Submitted By:				

OUTLINE AND DIMENSIONS

Capacities:

Cooling	24,200 BTU/h
Min/Max Cooling	5,200-26,000BTU/h
Outdoor Design Temperature <i>F° DB/WB</i>	95/75
SEER	18.0
EER	10.5
Low Ambient Temp <i>F°</i>	14
Voltage/Frequency/Phase	208-230/60/1

Indoor Unit:

Noise Level <i>db (A) - H/ M/ L/ Q</i>	47/41/36/32
Weight	31 lbs.


Outdoor Unit:

Noise Level <i>db (A)</i>	52
Recommended Fuse Size	29A
Min. Ampacity	21A
Running Current <i>(Rated/Max)</i>	10.1/12.0
Weight	97 lbs.

Refrigerant Piping:

Max Ht. Difference	66 ft.
Max Total or Combined Length	98 ft.
Discharge Vapor Line (O.D.)	1/4 in.
Suction (O.D.)	5/8 in.

Note: Figures are based on 230 Volts

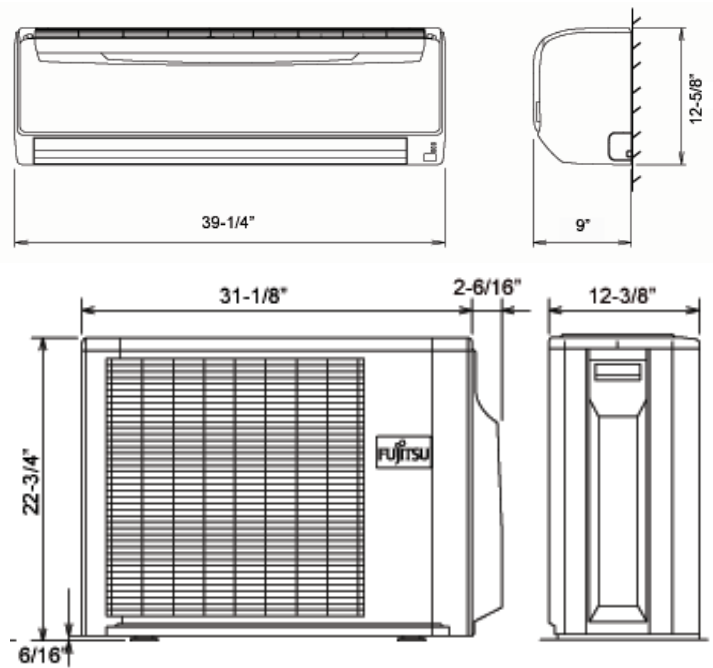

Standard Features:

- ◆ Six year compressor warranty
- ◆ Two year parts warranty
- ◆ Refrigerant R410A
- ◆ Auto Louver: 4 Way
- ◆ Auto Mode; Quiet Mode
- ◆ Ion Deodorizing Filter
- ◆ Cold Prevention
- ◆ Digital Wireless Remote Control
- ◆ Sleep timer; 24 hour timer
- ◆ Built in Low Ambient
- ◆ Auto Restart/ Reset
- ◆ Dry Mode
- ◆ Power Diffuser
- ◆ Apple Catechin Filter
- ◆ Optional Wired Remote Control

Notes:
