

# Submittal Data: System 42RCLX AUU42RCLX & AOU42RLX



Job Name: \_\_\_\_\_ Location: \_\_\_\_\_

Purchaser: \_\_\_\_\_

Engineer: \_\_\_\_\_

Submitted To: \_\_\_\_\_ For:  Reference  Approval  Construction

Submitted By: \_\_\_\_\_

## Capacities:

Cooling	42,700 BTU/h
Min/Max Cooling	13,700-45,000BTU/h
Outdoor Design Temperature <i>F<sup>o</sup> DB/WB</i>	95/75
Heating	45,200 BTU/h
Min/Max Heating	14,300-54,600BTU/h
Outdoor Design Temperature <i>F<sup>o</sup> DB/WB</i>	47/43
HSPF	8.5
SEER	15.0
EER <i>Cooling/Heating</i>	9.2/10.5
Low Ambient Temp. <i>F<sup>o</sup> Cooling/Heating</i>	0/0
Voltage/Frequency/Phase	208-230/60/1

## Indoor Unit:

Noise Level Cooling <i>db (A) - H/ M/ L/</i>	50/48/44
Noise Level Heating <i>db (A) - H/ M/ L/</i>	50/48/44
Weight	88 lbs.
Total Height	9-3/4 in.
Space required above ceiling	8-1/2 in.

## Outdoor Unit:


Noise Level <i>db (A) - Cooling/Heating</i>	55/56
Recommended Fuse Size	30A
Min. Ampacity	26A
Running Current Cooling ( <i>Rated/Max</i> )	20.3/21.7
Running Current Heating ( <i>Rated/Max</i> )	19.1/21.7
Weight	231 lbs.

## Refrigerant Piping:

Max Ht. Difference	98 ft.
Max Total or Combined Length	230 ft. each
Discharge Vapor Line (O.D.)	3/8 in.
Suction (O.D.)	5/8 in.

**Note: Figures are based on 230 Volts**

## OUTLINE AND DIMENSIONS

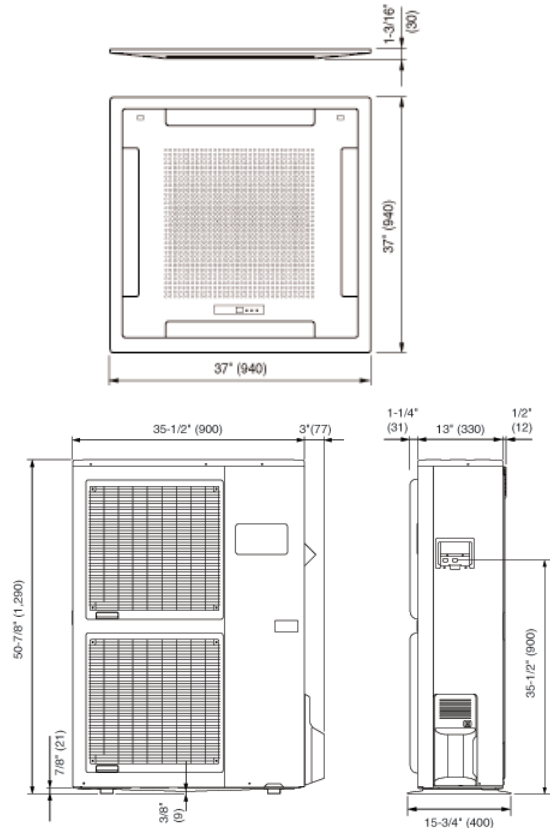

## Standard Features:

- ◆ Six year compressor warranty
- ◆ Two year parts warranty
- ◆ Weekly timer
- ◆ Auto Louver: Up/Down
- ◆ Energy saver; Slender Fit
- ◆ Pump Down Operation
- ◆ Full Function Wired Remote Control
- ◆ Cold Prevention
- ◆ Built in Low Ambient
- ◆ Auto Restart/ Reset
- ◆ Refrigerant R410A
- ◆ High Ceiling Mode
- ◆ Branch Duct Capable
- ◆ Auto Mode; Quiet Mode; Dry Mode

## Notes:

---



---



---